

ENS-RGB42UD

Standard:

Comply with ANSI/EIA
RS-310-D、IEC60297-2、DIN41494;PART1;
DIN41494;PART7

Material:


SPCC Cold Rolled Steel;
19" rails: 2.0mm, side panel:1.0mm,others: 1.2mm

Loading capacity:


Static loading: 800KG

Feature:



- *Flat packing and patent frame, packing time is less than 20 minutes,*
- Exquisite design with precise dimension and craftsmanship;
- Adjustable feet and heavy duty castors are available simultaneously;
- Cable entry on the top cover and bottom panel with adjustable sizes ;
- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation;
- Efficient and reliable cabinet connection by baying kit;
- Removable side panels to ease maintain;

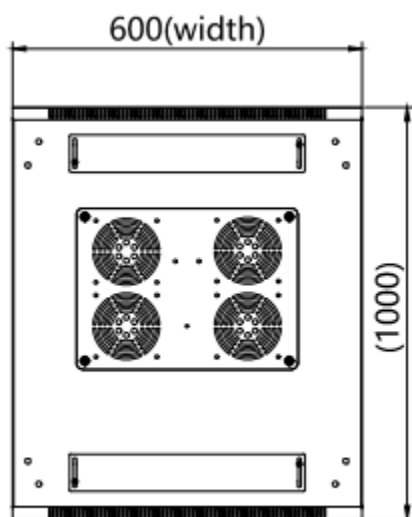


TOP

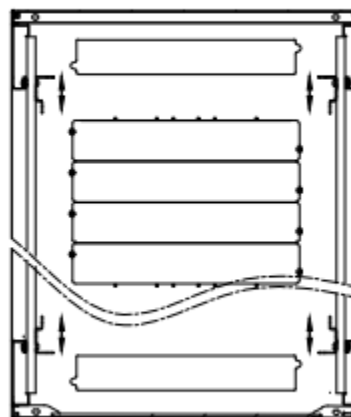


A-A SECTION

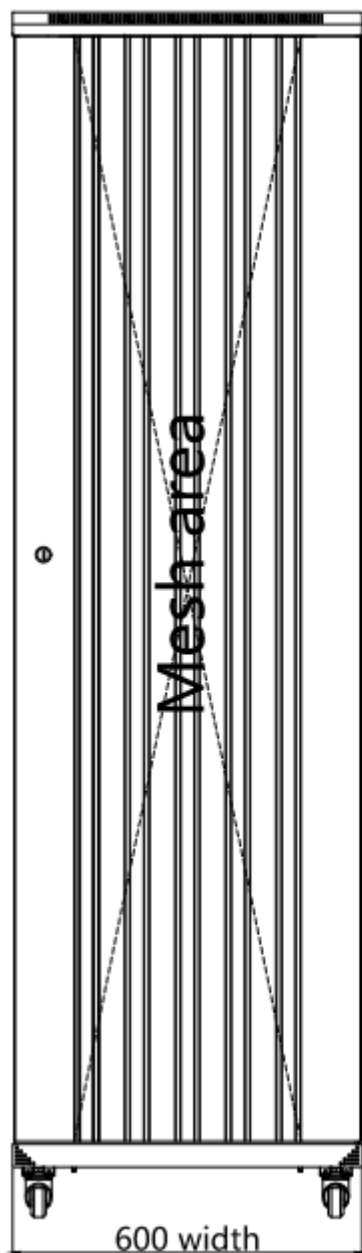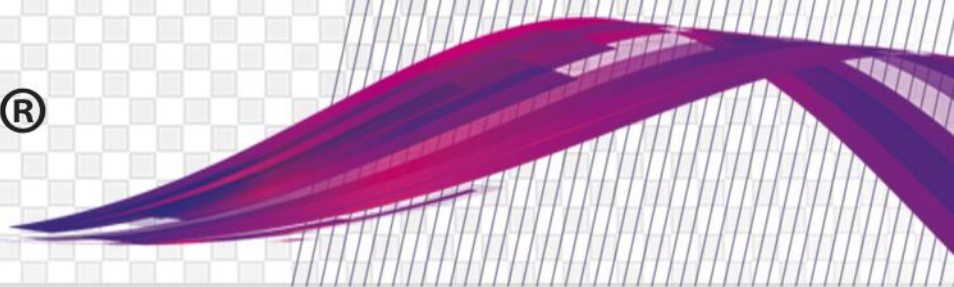

FRONT

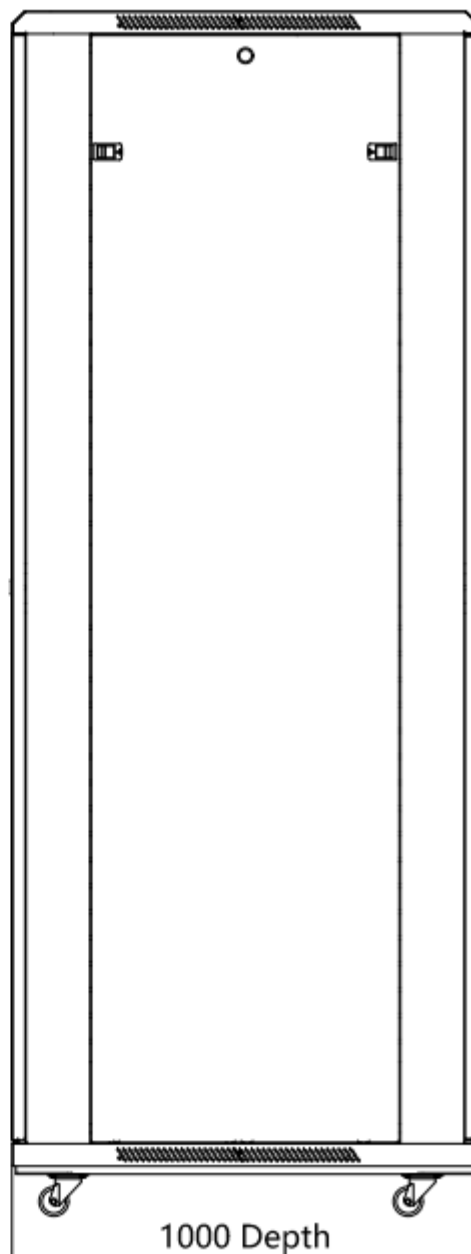

SIDE

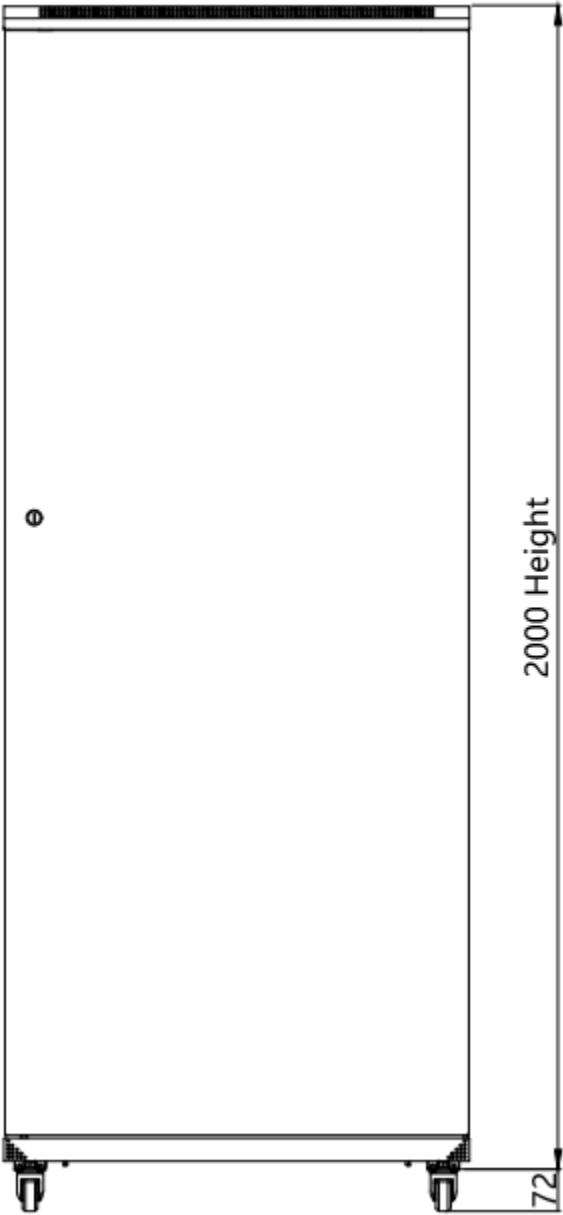

BACK